



HD4040

Professional High-Definition 4:2:2 and 4:2:0 Decoder With optional simultaneous High & Standard Definition decoding!

HIGHLIGHTS

- Front Panel Video and Audio Confidence Monitors
- Full Front panel control
- Extra rugged construction – **Built to travel!**
- Genlock Option*
- MPEG 4:2:0 or 4:2:2 Formats
- QPSK and ASI inputs standard, 8PSK & 16QAM Available
- Active ASI output
- DVB-S2 Demodulator now available
- DS3 / E3 and IP interfaces available *
- HD-SDI, HD-Component, SDI and Composite Video Outputs
- Four Audio pairs supported
- AES/EBU, Analog and Embedded audio in SDI and HDSDI
- Linear PCM *, AC-3 * and Dolby E Pass-through
- MPEG audio decoding standard, on-board AC-3 and Dolby E available soon*
- Various Conditional Access Options
- RS-232 remote control standard, Web Browser Remote Control available*
- Simple Browser based Remote Control
- Other input interfaces available*



PERFORMANCE

The HD4040 is Tiernan's newest High Definition & Standard Definition Decoder. It uses the latest advanced Tiernan Technology to offer both video and audio front panel confidence monitors. Through advances in integration, the HD4040 is able to offer an unprecedented combination of features, performance and reliability at an industry-leading price. The HD4040 is available in several different configurations designed to suit any decoding requirement. The HD4040 is a perfect complement for the HE4000 encoder and can be ordered with a complete set of the most advanced features available today, including a DVB-S2 receiver module, or ordered in a cost effective minimal configuration. The advanced monitoring features of the HD4040 guarantee the most cost-effective solution by eliminating the need for additional monitoring equipment.

SIMULTANEOUS DECODE (OPTIONAL)

Video production today is increasingly done in both Standard and High Definition. The HD4040 is the first true simultaneous high and standard definition decoder. The HD4040 receives an MCPC program stream and will decode both HD and SD programs at the same time.

VIDEO

The HD4040 Decoder supports all common HD and SD video formats. Video output formats supported include both composite analog and serial digital SDI for Standard Definition, and HD-SDI and Component video for High Definition. Video processing is automatically sensed by the HE4040 and processed at either 4:2:2 or 4:2:0.

AUDIO

The HD4040 Decoder decodes up to eight audio channels (4 pairs) with analog and digital outputs, and embedded in the SDI or HD-SDI. The optional Dolby E decoding module provides for full Dolby E onboard decoding.*

AUXILIARY & IP DATA

In its basic configuration, the HD4040 supports two independently programmable auxiliary data channels, asynchronous or synchronous. IP data capability coming soon.*

INPUT INTERFACES

The HD4040 Decoder is highly flexible and offers various input interfaces including: ASI and QPSK standard, and 8PSK, DS-3*, OC-3*, and 100 Base-T Ethernet* optional.


OPERATOR CONTROL

The HD4040 Decoder supports an embedded Web Browser Interface to allow for easy command and control programming. It also offers the options of RS-232 proprietary command line M&C. As with all Tiernan products, the HD4040 also has a fully featured control front panel.

* Contact factory for current availability

HD4040

Professional High-Definition 4:2:2 and 4:2:0 Decoder

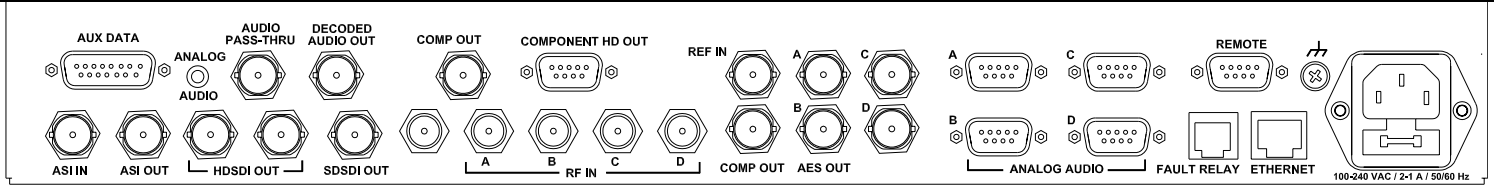

TECHNICAL SPECIFICATIONS

Input Interfaces:

QPSK L-band Receiver

- Four selectable L-Band Inputs
- DVB®-Compliant FEC Decoding, Deinterleaving, and Descrambling
- LNB Power Supplied Through the L-Band Feed Cable, 18V, 13V or Off
- Selectable, 350 mA Maximum Current

ASI with active ASI output

Standard Def. Video Processing:

- MPEG-2 4:2:0 Main Profile @ Main Level (1 to 15 Mbps)
- MPEG-2 4:2:2 Studio Profile @ Main Level (2.5 to 50 Mbps)
- Horizontal Resolutions: 720, 544, 480, and 352
- Vertical Resolutions: 480/240 (NTSC) and 576/288 (PAL)

Standard Def. Video Output:

- Composite Analog NTSC (525) or PAL (625)
- Serial Digital Component Video (SMPTE 259M)

Standard Def. VBI Data:

- Proprietary Passage of NTSC Line 21 Closed Captions
- DVB 4:2:2 Expanded Windows Carries WSS, VPS, VITC, CC, AMOL, XDS, etc.
- ATSC Closed Captioning, DVB Teletext, and Others coming soon*

High Def. Video Processing:

- MPEG-2 4:2:2 Studio Profile @ High Level (Up To 80 Mbps)
- MPEG-2 4:2:0 Main Profile @ High Level (Up To 80 Mbps)
- HD Resolutions: 1920 x 1080i (30, 29.97, 25, 24* fps) and 1280 x 720p (60, 59.94, 50 & 24* fps)

High Def. Video Output:

- Two Serial Digital Outputs Per SMPTE 292M SDI @ 1.485 Gbps, BNC
- Analog HD Video, 15-Pin D Connector
- Down converted Composite Analog Video, BNC (For Monitoring Purposes Only)

High Def. VBI Data:

- ATSC Closed Captioning – Full EIA-608 and EIA-708 support
- Others coming soon*

Audio:

- Eight Audio Channels (4 pairs) (Analog, Digital or Embedded)
- MPEG or AC-3 2.0 decode *
- Linear PCM *, and Dolby® AC-3 * and E Pass-Through

Front Panel

- Rugged Pushbuttons, Illuminated LCD, Bright Indicator LEDs, Special function Buttons
- Analog Audio on Mini-Phono Jack (For Monitoring Purposes Only)
- Full color LCD monitor

Auxiliary Data Processing:

- One Async: 1200 - 115200 bps EIA-232; on DB-9 Connector
- One Sync: 1 - 20 Mbps, EIA-422; on DB-9 Connector
- IP Data: Coming Soon*

Conditional Access:

- PGCA Proprietary Conditional Access
- BISS (Basic Interoperable Scrambling System) Modes 1, and E
- Tiernan Proprietary advanced CA system coming soon*

Optional Interface Modules:

- QPSK/8PSK/16QAM Receiver
- DVB-S2 Receiver
- DS-3, OC-3, and 100 Base-T Ethernet*

Management & Control:

- Embedded Web Browser Interface For Command and Control *
- RS-232 Proprietary Command Line Monitor & Control
- Fully functional Front Panel control

Physical:

- 2RU Standard 19" Rack-Mount - 8.9 cm High x 48.3 cm Wide x 58.4 cm Deep (3.5" x 19" x 17")
- 1RU Lower cost version available
- Weight Less Than 10.5 kg (23 lbs.)

Power Supply:

- Auto-Sensing, Auto-Ranging 90-240 VAC, 50-60 Hz Universal Power Supply, 44 Watts (Typical)

Operating Conditions:

- Ambient Temperature: 0° to 50°C

* Contact factory for availability

USA/Canada/Latin America: 7330 Trade Street, San Diego, California 92121 Tel: +(1)858.805.7000 Fax: +(1)858.805.7001

3138 East Elwood Street, Phoenix, Arizona 85034 Tel: +(1)602.437.9620 Fax: +(1)602.437.4811

Europe/Middle East/Africa: Charwell House, Wilsom Road, Alton, GU34 2PP, United Kingdom

Tel: +(44)1420.540.233 Fax: +(44)1420.540.232

China: Room 405, Building B, Heqiao Mansion, No. 8 Guanghua Road, Chaoyang District, Beijing 100026 China

Tel: +(86)10.658.31975 Fax: +(86)10.658.31974

Asia-Pacific: 15 McCallum Street, #12094, NatWest Centre, Singapore 069045

Tel: +(65)6325.1951 Fax: +(65)6325.1950

Indonesia: Jl M.T. Haryono Kav 25, Jakarta, Indonesia 12820 Tel: +(62)21.521.3733 Fax: +(62)21.252.0142

Prices, specifications, and availability subject to change without notice. All trademarks acknowledged.

© 2005 Radyne Corporation. All rights reserved.

